


2.54 Series

Female Header

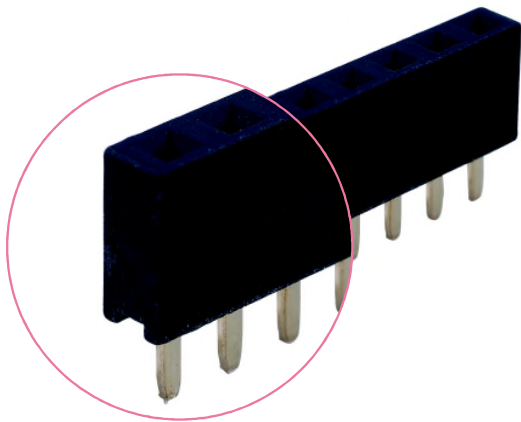



SPECIFICATIONS

Current Rating:
 3 Amps
Insulator resistance:
 5000 Megohms Min.
Contact resistance:
 20 m ohm Max.
Dielectric withstanding:
 AC 500 V
Operating Temperature:
 -40° - +105°C
Contact Material:
 Phosphor Bronze
Insulator Material:
 Standard:P.B.T
Finish:
 Gold flash or Tin plated or Duplex plating

Recommended P.C.Board Hole Layout



2.54 ± 0.05

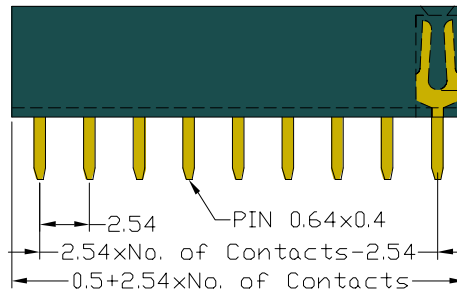

P 8 5 5 7 - x x S 1 0 - x x x

Number of contacts

S10 - Straight

Plating thickness

01	Normal
03	3 μ
05	5 μ
10	10 μ
15	15 μ
30	30 μ

Plating material

G	Gold plated
T	Tin plated
P	Lead & Tin plated
H	Selective gold plated