





# 2.0 Series

## Battery Socket

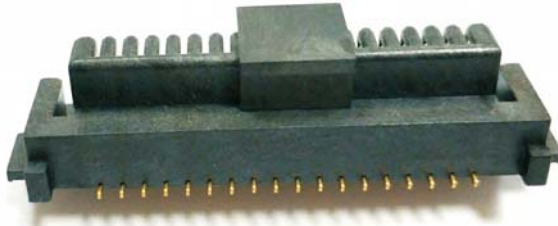

### SPECIFICATIONS

Current Rating:  
 4 Amps  
 Voltage Rating:  
 125V  
 Insulator resistance:  
 3000 Megohms Min.  
 Contact Resistance:  
 20m ohms Max  
 Dielectric withstanding:  
 AC 500 V  
 Operating Temperature:  
 -40°C - +125°C  
 Contact Material:  
 Phosphor Bronze 0.30mm  
 Insulator Material:  
 L.C.P UL94V-0  
 Color: Black  
 Finish:  
 3U"min.Gold plating on  
 contact area  
 others area Gold flash over  
 50U" Nickel

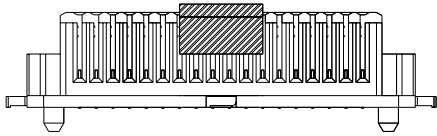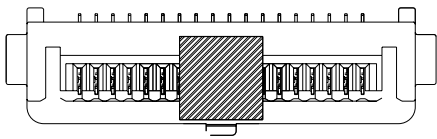

L 2 0 1 6 - 1 8 M O P X - 0 3 X - C

**Insulator material**  
 N: Nylon-6T  
 B: PBT  
 L: LCP  
 D: NY66

**Number of Contact**

**Appearance of pin header**  
 S10: Straight  
 D10: Right angle  
 MOP:SMT

Color

**Plating material**  
 G Gold Plated  
 T Tin Plated  
 H Duplex Plated

**Plating thickness**  
 01 Normal  
 08 8u"  
 15 15u"